



for


LED



## SimpoleD SimpoLED-81 Series Star Heat Sinks $\phi 81\text{mm}$ for COB Modular Product Brief

### Features VS Benefits

- \* Mechanical compatibility with direct mounting of the LED modules to the LED cooler and thermal performance matching the lumen packages.
  - \* Thermal resistance range  $R_{th}(1.85^{\circ}\text{C/W}; 2.17^{\circ}\text{C/W})$ .
  - \* Modular design with mounting holes foreseen for direct mounting of a wide range of LED modules and COB's:
  - \* Diameter 81mm - Standard height 50.0mm / 80.0mm , Other heights on request.
  - \* Extruded from highly conductive aluminum.
- 2 standard colors - clear anodised - black anodised
- Zhaga Book 3 Spot Light Modules Edison ,Bridgelux , Osram ,Citizen ,Lumileds ,Cree , Tridonic , Vossloh-Schwabe ,Seoul ,LG ,Lustrous ,Prolight ,Samung ,SHARP , Luminus

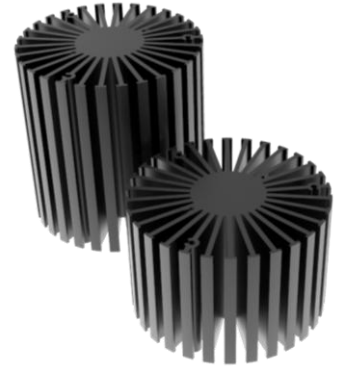

- 01) Bridgelux ESS, ESR, Ver0 10;
- 02) Citizen CLL022-CLU024, CLL032-CLU034;
- 03) Cree XLamp CXA13xx, CXA15xx, CSA18xx;
- 04) Lumileds Luxeon COB's 1203, 1204, 1205, Luxeon K arrays K12, K16;
- 05) Osram PrevaLED Core, SOLERIQ P and SOLERIQ S LED engines.
- 06) Seoul Semiconductor ZC6, ZC12, ZC18, ZC25;
- 07) Tridonic TALEXX module SLE modules;
- 08) LG Innotek LEMWM18 10W, 13W, 17W
- 09) Edison EdiLex SLM and EdiLex II COB LED engines.
- 10) Lustrous LUSTRON 6 series LL604F, LL608D, LL613F, LL620F
- 11) Prolight Opto PABS, PABA, PACB, PANA
- 12) Samung LC013, LC019, LC026 COB LED engines.
- 13) SHARP Mini Zenigata Intermod and Mega Zenigata LED engines.
- 14) Vossloh-Schwabe LUGA Shop LED engines.
- 15) Luminus C##9, C##14 LED engines.

### Order Information

Example: SimpoLED-8150B-#

Example: SimpoLED-81 **1** - **2** - **3**

**1** Hight (mm)

**2** Anodising Color

B-Black

C-Clear

Z-Custom

**3** Mounting Options - see graphics for details Combinations available

Ex.order code - 12

means option 1 and 2 combined


MingFa recommends the use of a high thermal conductive interface between the LED module and the LED cooler. Either thermal grease, a thermal pad or a phase change thermal pad thickness 0.1-0.15mm is recommended.

Notes:

- Mentioned models are an extraction of full product range.
- For specific mechanical adaptations please contact MingfaTech.
- MingfaTech reserves the right to change products or specifications without prior notice.

**SimpoleD** *SimpoleD-81 Series Star Heat Sinks  $\Phi$ 81mm for COB Modular Product Brief*

The product data table



Brand	Mingfa Tech	
Series Name	SimpoleD star heat sinks	
Series Number	SimpoleD-81	
Manufacturing Technology	Aluminum extrusion	
Material	AL6063-T5	
Color & Finishing	Black Anodized	
Certification	CE, ROHS, WEEE	
Diameter(mm)	$\Phi$ 81	
Height(mm)	50.0mm	80.0mm
Item Number	SimpoleD-8150	SimpoleD-8180
Max. Lumen	3200 lm	4000 lm
Dissipated Power (Ths-amb,50°C)	23.0 W	27.0 W
Thermal Resistance Rth (°C/W)	2.17°C/W	1.85 °C/W
Cooling Surface Area (mm <sup>2</sup> )	94517.0 mm <sup>2</sup>	148406.0 mm <sup>2</sup>
Net Weight (g)	318.0 g	508.0 g
Quantity (pcs/CTN)	36 pcs	27 pcs
Modular Types	COB	COB
For Environments	Indoor area	
For Lightings	Down lights,Architectural lights	
For Application	Retail & Hospitality,Mall & Food,Architectural & Museums,Office & Education, Station & Airport,Healthcare	
For LED brands	Aaura,Bridgelux,BJB,Citizen,Cree,Edison,GE,LG,Lumileds,Lumens,Luminus,Ledil,Nichia, Osram,Prolight Opto,Samsung,Seoul,Sharp,Tridonic,Vossloh Schwabe,Zhaga	

\* 3D files are available in ParaSolid, STP and IGS on request

\* The thermal resistance Rth is determined with a calibrated heat source of 14mm×14mm central placed on the heat sink, Tamb 40° and an open environment. Reference data @ heat sink to ambient temperature rise Ths-amb 50°C  
The thermal resistance of a LED cooler is not a fix value and will vary with the applied dissipated power Pd

\* Dissipated power Pd. Reference data @ heat sink to ambient temperature rise Ths-amb 50°C  
The maximal dissipated power needs to be verified in function of required case temperature Tc or junction temperature Tj and related to the estimated ambient temperature where the light fixture will be placed  
Please be aware the dissipated power Pd is not the same as the electrical power Pe of a LED module

To calculate the dissipated power please use the following formula:  $P_d = P_e \times (1-\eta_L)$


Pd - Dissipated power

Pe - Electrical power



$\eta_L$  = Light efficiency of the LED module

**SimpoLED** *SimpoLED-81 Series  $\Phi$ 81mm COB Heat Sink Drawings*



**Drawings & Type Selection**

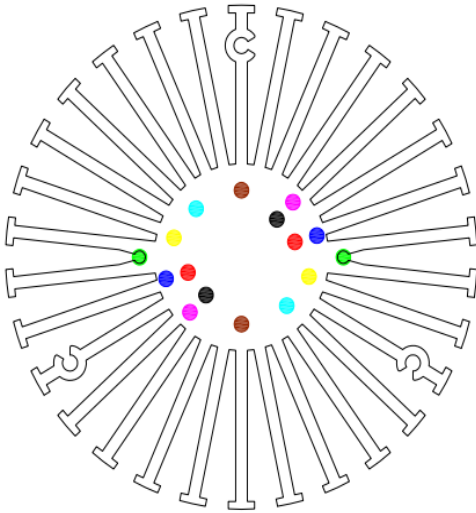

MOUNTING OPTION		THREAD HOLE DISTANCE
A1	●	17.2 mm @ 2-180°
A2	●	19.0 mm @ 2-180°
A3	●	21.5 mm @ 2-180°
A4	●	22.0 mm @ 2-180°
A5	●	24.0 mm @ 2-180°
A6	●	25.0 mm @ 2-180°
A7	●	26.8 mm @ 2-180°
A8	●	35.0 mm @ 2-180°

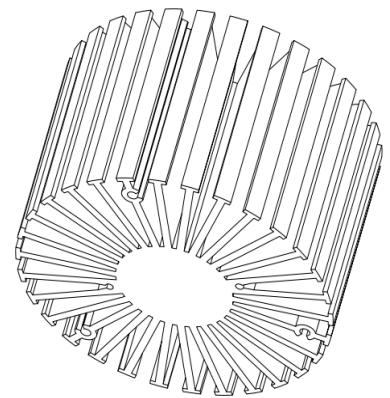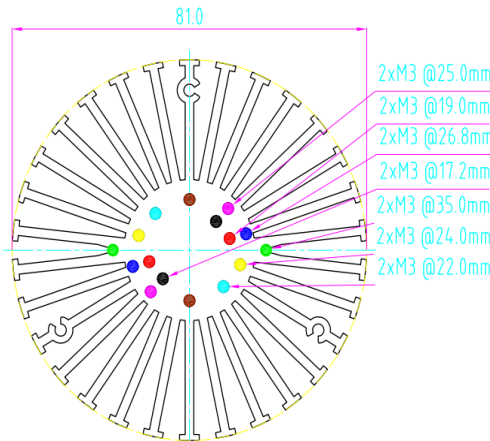

**Product display**






**SimpoleD** *SimpoleD-81 Series  $\phi$ 81mm Material AL6063-T5 COB Star Heat Sinks Thermal Data*

**The thermal data table**

**SimpoleD-81 thermal data**

Dissipated Power Pd(W)	Heat sink to ambient temperature rise Ths-amb (°C)	
	SimpoleD-8150	SimpoleD-8180
6	15.6	10
12	26.2	15
18	36	30.5
24	46.8	37.2
30	51.8	46.2
35		54.3

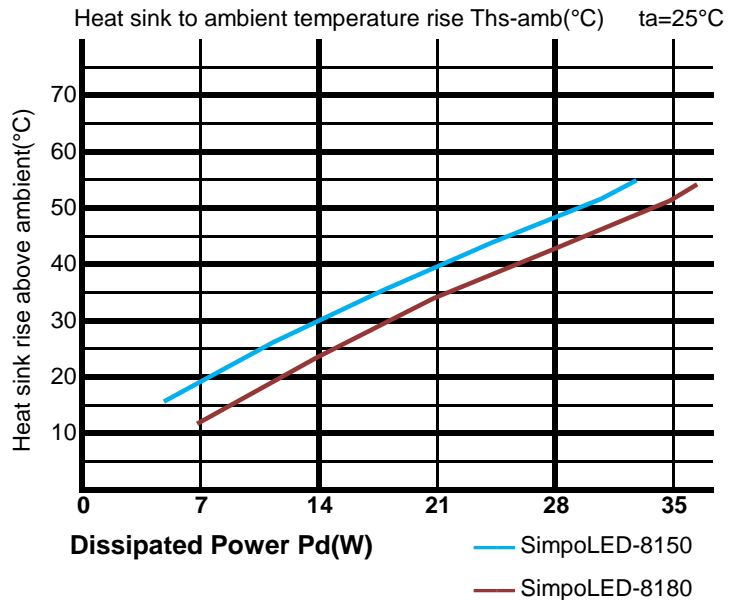

\* Please be aware the dissipated power Pd is not the same as the electrical power Pe of a LED module.

\*To calculate the dissipated power please use the following formula:  $P_d = P_e \times (1 - \eta_L)$ .

Pd - Dissipated power ; Pe - Electrical power ;  $\eta_L$  = Light efficiency of the LED module;

\*The aluminum substrate side of the package outer shell is thermally connected to the heat sink via TIM (Thermal interface material).

MingFa recommends the use of a high thermal conductive interface between the LED module and the LED cooler.

Either thermal grease, A thermal pad or a phase change thermal pad thickness 0.1-0.15mm is recommended.

