


LED Heat sink MF600A-GE

Features

1. Designed for GE-SM-5000LM.
2. All values are typical at 35°C unless otherwise stated.
3. Mentioned models are an extraction of full product ranges.
4. Thermal resistance values are given as reference only and are measured in free air without airflow obstructions.
5. Compatible with most popular LED COB modules of Xicato XSM/XPM, Philips, BridgeLux, GE Infusion, Osram, Citizen, Nichia, Sharp, etc.
6. ROHS compliance, Zhaga standard, mounting holes for options, finish for options.

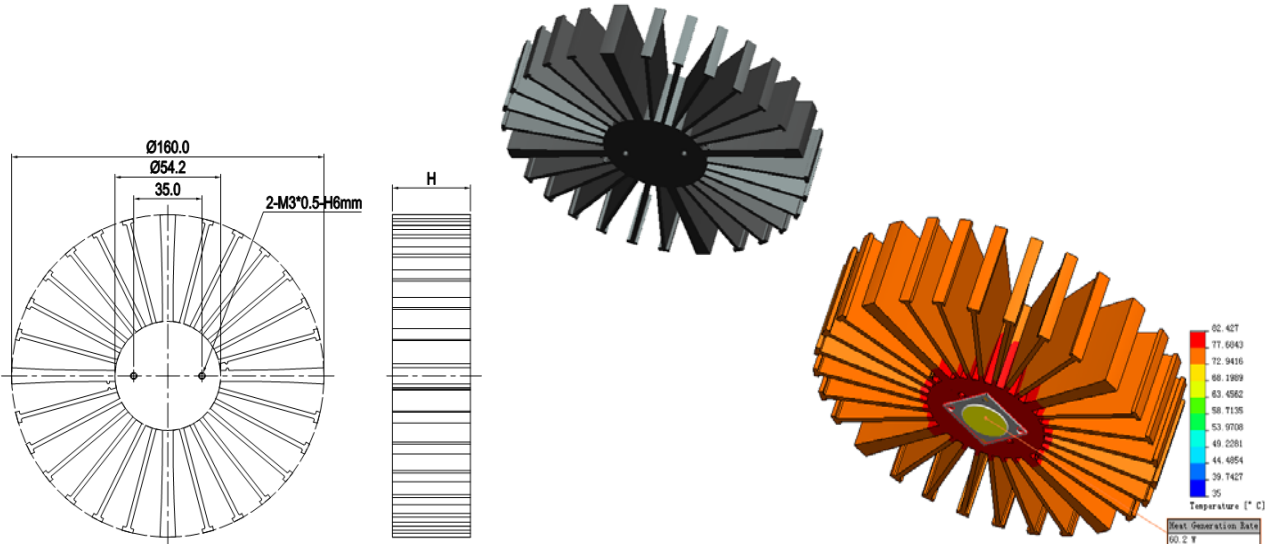

				
Model No.	MF160301A-GE-SM	MF160302A-GE-SM	MF160401A-GE-SM	MF160402A-GE-SM
Size	D160xH30mm	D160xH30mm	D160xH40mm	D160xH40mm
Material	6063-T5	6063-T5	6063-T5	6063-T5
Finish	Black Anodized	Clear Anodized	Black Anodized	Clear Anodized
Thermal Wattage	55W		60.2W	
HeatsinkOs-a²	112490		145554	
Heat Sink T Rise Above Ambient	0.9		0.814	

Heat sink to ambient temperature rise $T_{hs-amb}(^{\circ}C)$

